

PRODUCT DATASHEET

Confidex Steelwave Flex™



Global and compact UHF RFID label optimized for metallic surfaces with flexible attachment on curved assets.

ELECTRICAL SPECIFICATION

Device type

RAIN RFID / EPCglobal Gen2v2

Operational frequency

Global 865-928 MHz

IC options and memory configurations

Impinj M780™

- EPC 496 bit; User 128 bit; TID 96 bit

Impinj Monza 4E™

- EPC 496 bit; User 128 bit; TID 96 bit

Read range (2W ERP)*

M780:

- On flat metal up to 8 m / 26 ft
- On Ø50mm radius metal up to 8 m / 26 ft
- On Plastic ETSI 2 m / 6 ft
- On Plastic FCC 5 m / 16 ft

M4E:

- On flat metal up to 5 m / 16 ft
- On Ø50mm radius metal up to 5 m / 16 ft
- On Plastic ETSI 1 m / 3 ft
- On Plastic FCC 5 m / 16 ft

Applicable surface materials*

All surfaces but performance optimized for metal

Attachment on curved surface*

Label can be attached on a curved surface with smallest diameter of 50mm. For best performance follow the attachment instructions.

* Read ranges are theoretical values that are calculated for non-reflective environment. Different surface materials may influence performance.

MECHANICAL SPECIFICATION

Label surface

White specially coated PP for high printing quality. Resin ribbon recommended.

Background adhesive

High tack adhesive with excellent adhesion to all surfaces including low surface energy plastics and painted metal.

Weight

1 g

Delivery format

250 pcs good labels on reel, bad ones marked with "XXX" printing. Typical yield >95%

Pitch on reel


34,29 mm / 1.35"

Reel core inner diameter

76 mm / 3"

Tag dimensions

55 (+0,5/-1,5) x 25 x 2.2 mm / 2.17 x 0.98 x 0.087"

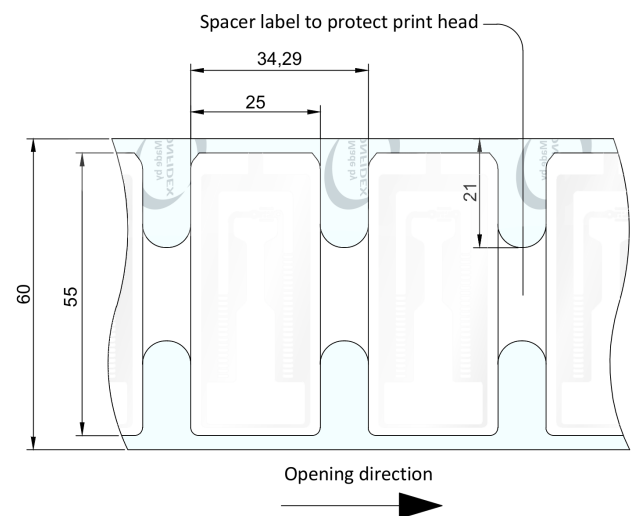

ENVIRONMENTAL RESISTANCE

Operating temperature

-35°C to +85°C / -31°F to +185°F

Ambient temperature

-35°C to +85°C / -31°F to +185°F

Short periods (minutes) +140°C / 284°F

Water resistance

IP68

Washing resistance

Tolerates industrial washing with standard solvents. Washing process should be tested in final application.

Chemical resistance

No physical or performance changes in:


- 168h Motor oil exposure
- 168h Salt water (salinity 10%) exposure
- 2h Sulfuric acid (10%, pH 2) exposure
- 30min NaOH (10%, pH 13) exposure
- Wiping with acetone

Storage condition

1 year in +20°C / 50% RH

Environmental values are the best recommendations; resistance against different conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested.

INSTALLATION INSTRUCTIONS

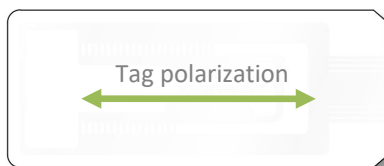


When attaching the label ensure the following

- Select a smooth surface without uneven areas below tag
- Avoid touching the background adhesive and IC location


When mounting the label with its adhesive, clean and dry the surface for obtaining the maximum bond strength. Typical cleaning solvents are heptane or acetone for oily surfaces or isopropyl alcohol for plastics. Do not use household cleaning solvents that contain oils. Carefully read and follow the manufacturer’s precautions and directions for use when working with solvents.

Ideal application temperature is from +21°C to +38°C (+70°F to +100°F). Bond strength can be improved with firm application pressure and moderate heating up to +54°C (+130°F). Application at temperatures below 10°C (50°F) is not recommended.

Optimal read range is achieved when label is attached close to the edge of metal asset, like shown in below picture.

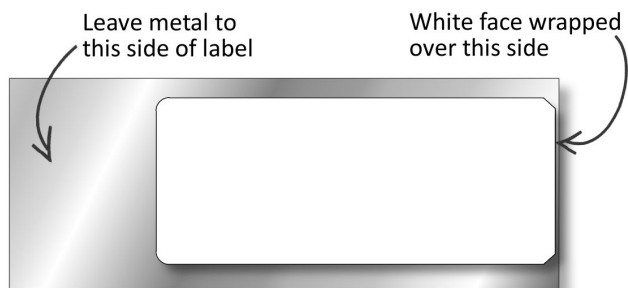

Smallest recommended bending diameter of the Confidex Steelwave Flex™ is 50mm. For optimal read range please bend the label in the orientation shown below. Note that with smaller assets it is recommended to bend the label to other direction for optimal adhesion.

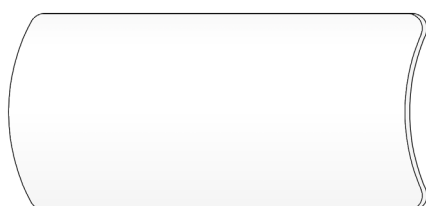

PRINTER COMPATIBILITY

The Confidex Steelwave Flex™ is tested to work with the Custom Zebra ZT410 RFID Silverline and ZT411 On-Metal printers. For more information please contact Confidex.

ORDER INFORMATION

Product number: 3004304

Product name: Confidex Steelwave Flex™ M780

Product number: 3001568

Product name: Confidex Steelwave Flex™ M4E

For additional information and technical support, please contact Confidex Ltd.

DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.