

# Technical Accessory Guides (TAGs)

For Associates, Resellers, ISVs and Alliance Partners

Global



Version: Active-Only

Will only show products that are known to be available for sale

Need to provide an update or change?

Contact <mailto:pgw786@zebra.com>



For Internal Use by  
**PartnerConnect Members Only**



# MC9300/MC9400 Technical Accessory Guide



NOTE: This document is only for general reference. Solutions Pathway and related PMBs should be used for product availability, pricing, and final solution selection.


\* Zebra does not endorse or specifically recommend any **third-party products, accessories, or hardware**. ZEBRA DISCLAIMS ANY AND ALL LIABILITY, INCLUDING ANY EXPRESS OR IMPLIED WARRANTIES, WHETHER ORAL OR WRITTEN, FOR SUCH THIRD PARTY PRODUCTS, ACCESSORIES, OR HARDWARE. THE CUSTOMER ACKNOWLEDGES THAT NO REPRESENTATION HAS BEEN MADE BY ZEBRA AS TO THE FITNESS OF THE THIRD-PARTY PRODUCTS, ACCESSORIES, OR HARDWARE FOR THE CUSTOMER'S INTENDED PURPOSE.

## Cradles and Charging

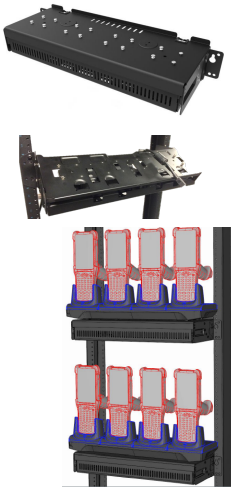

### Single Device Cradles

Part Number	Picture	Description	Notes	Required Items
CRD-MC93-2SUCHG-01		Single Slot Charge/Communication Cradle	<ul style="list-style-type: none"> <li>▶ Provides USB support</li> <li>▶ Supports device and spare battery charging.</li> <li>▶ Supports fast-charging of device and battery:               <ul style="list-style-type: none"> <li>- charges battery from 0-90% in about 3.5 hours.</li> </ul> </li> <li>▶ LED notification of spare battery charging status.</li> <li>▶ Does not support mounting on Multi-Slot Wall/Rack Mount Bracket (BRKT-SCRD-SMRK-01).</li> </ul>	<ul style="list-style-type: none"> <li>▶ Power Supply (PWR-BGA12V50W0WWW and CBL-DC-388A1-01) - or KIT-PWR-12V50W which includes both.</li> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> <li>▶ USB-C cable (CBL-TC5X-USBC2A-01 or CBL-TC2X-USBC-01) or similar 3rd party USB-C standard cable</li> </ul>
PSCMC9300E (3rd party) *  <a href="http://www.portsmith.com">http://www.portsmith.com</a>		Portsmith Single Slot Ethernet Cradle Kit	<ul style="list-style-type: none"> <li>▶ Cradle communicates with the device via USB . No additional drivers are required.</li> <li>▶ Connects to the LAN via a 10/100 mbps Ethernet connection.</li> <li>▶ Kit includes: cradle, Ethernet cable, Power Supply, and AC Cord.</li> </ul>	


### Multi-Device Cradles

Part Number	Picture	Description	Notes	Required Items
CRD-MC93-4SCHG-01		4-Slot Charge-Only ShareCradle	<ul style="list-style-type: none"> <li>▶ Will charge up to four devices.</li> <li>▶ Does not charge spare batteries.</li> <li>▶ Supports fast-charging of device:               <ul style="list-style-type: none"> <li>- charges battery from 0-90% in about 3.5 hours.</li> </ul> </li> <li>▶ Can be racked/ mounted in a standard 19inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01)</li> </ul>	<ul style="list-style-type: none"> <li>▶ DC Line Cord (CBL-DC-381A1-01) and Power Supply (PWR-BGA12V108W0WWW)</li> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>


<p>CRD-MC93-4SETH-01</p>		<p>4-Slot Ethernet/Charging ShareCradle</p>	<ul style="list-style-type: none"> <li>▶ Allows network speeds up to 1 Gb</li> <li>▶ Will charge up to four devices.</li> <li>▶ Supports fast-charging of device:             <ul style="list-style-type: none"> <li>- charges battery from 0-90% in about 3.5 hours.</li> </ul> </li> <li>▶ Provides Ethernet daisy chaining support for connecting multiple cradles together.</li> <li>▶ Can be racked/mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01)</li> </ul>	<ul style="list-style-type: none"> <li>▶ DC Line Cord (CBL-DC-381A1-01) and Power Supply (PWR-BGA12V108W0WWW)</li> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>
<p>PSP4MC9300 (3rd party) *</p> <p><a href="http://www.portsmith.com">http://www.portsmith.com</a></p>		<p>Portsmith Multi-Slot Charge-Only Cradle Kit</p>	<ul style="list-style-type: none"> <li>▶ Will charge up to four devices.</li> <li>▶ Does not charge spare batteries.</li> <li>▶ Kit includes: cradle, Power Supply, and AC Cord.</li> </ul>	
<p>ADP-MC93-CRDCUP-01</p>		<p>MC9300/MC9400 Adapter Cup to MC90/MC91/MC92 Legacy Cradles</p>	<ul style="list-style-type: none"> <li>▶ Allows MC9300/MC9400 to be used with MC90/MC91/MC92 Single Slot and Multi-Slot Cradles.</li> <li>▶ Adapter Cup includes circuitry to convert between voltages differences of MC90/MC91/MC92 and MC9300/MC9400.</li> <li>▶ NOTE: Adapter Cup does not provide communications support (USB, Serial, Ethernet). Will only provide charging support.</li> <li>▶ Does NOT support fast-charging of MC9300/MC9400. MC9300/MC9400 used in legacy cradles will be charged at standard rate:             <ul style="list-style-type: none"> <li>- charges battery from 0-90% in about 5.8 hours at standard charging rate.</li> </ul> </li> <li>▶ Order one Adapter Cup for Single Slot Cradles and four Adapter Cups for Multi-Slot Cradles.</li> </ul>	
<p>CUP-MC93-ADP-01</p>		<p>Replacement Charge-Only Cradle Cup</p>	<ul style="list-style-type: none"> <li>▶ Can be used to replace a damaged cradle cup.</li> <li>▶ NOTE: Cradle Cup is 1.25x width vs. other Zebra device cradle cups (i.e. TC2X, TC5X, TC7X series). Using this cup to create a multi-slot cradle supporting a mixed combination of devices is typically not supported.</li> <li>▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</li> </ul>	

BRKT-SCRD-SMRK-01		4-Slot ShareCradle Mounting Bracket	<ul style="list-style-type: none"> <li>▶ Allows for rack and wall mounting of one MC9300/MC9400 4-Slot ShareCradle.</li> <li>▶ Bracket can be mounted on standard 19" network rack or on a wall.</li> <li>▶ Has cable routing slots and removable power supply tray that stores and conceals power supplies.</li> <li>▶ Adjustable tabs &amp; screw mounts for easy hanging/installation.</li> <li>▶ Adjustable orientations: <ul style="list-style-type: none"> <li>- 25° High Density</li> <li>- Horizontal</li> </ul> </li> <li>▶ See the Bluetooth-Generic Accessories TAG for info on 3rd party Network Racks that can be used for mounting this bracket.</li> </ul>	
ADP-TC7X-PLT-FX		5-Slot ShareCradle Mounting Bracket Adapter Plate for Honeywell	<ul style="list-style-type: none"> <li>▶ Allows Zebra Multi-Slot ShareCradles to be mounted on legacy Honeywell Flex Cradle Wall Mount Brackets (HON SKU #203-641-002).</li> <li>▶ Includes hardware to attach plate to HON wall bracket and secure ShareCradle to plate.</li> <li>▶ <b>NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</b></li> </ul>	


**Battery Charging**

Battery Charging				
Part Number	Picture	Description	Notes	Required Items
SAC-MC93-4SCHG-01		4-Slot Battery Charger	<ul style="list-style-type: none"> <li>▶ This cradle charges spare batteries only.</li> <li>▶ Supports fast-charging of batteries: <ul style="list-style-type: none"> <li>- charges battery from 0-90% in about 3.3 hours vs. 5.8 hours for standard charging rate.</li> </ul> </li> <li>▶ Does not support mounting on Multi-Slot Wall/Rack Mount Bracket (BRKT-SCRD-SMRK-01).</li> <li>▶ Units manufactured after 11/2022 will include a USB-C port which enables firmware updates on the charger. No other USB functions are supported.</li> </ul>	<p><u>To power single 4-slot Charger:</u></p> <ul style="list-style-type: none"> <li>▶ Power Supply (PWR-BGA12V50W0WW)</li> <li>▶ DC Line Cord (CBL-DC-388A1-01)</li> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul> <p><u>To power two sets of 4-slot Chargers from one power supply:</u></p> <ul style="list-style-type: none"> <li>▶ Power Supply (PWR-BGA12V108W0WW)</li> <li>▶ DC Y-Cable Line Cord (CBL-DC-523A1-01)</li> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul> <p><u>To power four 4-slot Chargers:</u> Use 16-Slot Battery Charger (SAC-MC93-16SCHG-01) instead.</p>





SAC-MC93-16SCHG-01		16-Slot Battery Charger	<ul style="list-style-type: none"> <li>▶ Charges spare batteries.</li> <li>▶ Supports fast-charging of batteries: <ul style="list-style-type: none"> <li>- charges battery from 0-90% in about 3.3 hours vs. 5.8 hours for standard charging rate.</li> </ul> </li> <li>▶ Can be racked/mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01).</li> <li>▶ Units manufactured after 11/2022 will include a USB-C port which enables firmware updates on the charger. No other USB functions are supported.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Power Supply (PWR-BGA12V108W0WWW)</li> <li>▶ DC Line Cord (CBL-DC-381A1-01)</li> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>
--------------------	---	-------------------------	---	--

**Direct to Device Charging**


Part Number	Picture	Description	Notes	Required Items
CBL-MC93-USBCHG-01		USB Communication/Charging Cable Adapter	<ul style="list-style-type: none"> <li>▶ Attaches to charge/communication port on bottom of device.</li> <li>▶ Provides both USB communications and charging support via USB-C connector.</li> <li>▶ Will charge battery from 0-90% in as little as 3.5 hours when used with USB Power Supply (PWR-WUA5V12W0xx)</li> </ul>	<ul style="list-style-type: none"> <li>▶ USB-C cable (CBL-TC5X-USBC2A-01 or CBL-TC2X-USBC-01) or similar 3rd party USB-C standard cable</li> <li>▶ USB charger...</li> <li><b>Indoor use:</b> order Country Specific version of USB Power Supply (PWR-WUA5V12W0xx)</li> <li><b>In Vehicle use:</b> USB Cigarette Lighter Adapter (CHG-AUTO-USB1-01)</li> </ul>

**Communication Cables**

Part Number	Picture	Description	Notes	Required Items
CBL-TC5X-USBC2A-01		USB-C cable for Charging/Communication	<ul style="list-style-type: none"> <li>▶ USB-A to USB-C cable</li> <li>▶ Attaches to Single Slot Charge/Communication Cradle (CRD-MC93-2SUCHG-01) OR to USB-C port on the USB Communication-Charging Cable Adapter (CBL-MC93-USBCHG-01).</li> <li>▶ Cable length is 1M (~3.25 ft.)</li> </ul>	<ul style="list-style-type: none"> <li>For use with USB Communication/Charging Cable Adapter (CBL-MC93-USBCHG-01);</li> <li>▶ For charging via AC Wall Outlet: USB Power Adapter (PWR-WUA5V12W0US - or country specific version)</li> <li>▶ For charging in-vehicle: USB Cigarette Lighter Adapter (CHG-AUTO-USB1-01)</li> </ul>
CBL-TC2Y-USBC90A-01		USB-C cable with right angle connector for Charging/Communication	<ul style="list-style-type: none"> <li>▶ USB-A to USB-C cable</li> <li>▶ USB-A connector end has a 90° bend allowing cable to be used in tighter locations.</li> <li>▶ Attaches to Single Slot Charge/Communication Cradle (CRD-MC93-2SUCHG-01) OR to USB-C port on the USB Communication-Charging Cable Adapter (CBL-MC93-USBCHG-01).</li> <li>▶ Cable length is about 1.1M (45").</li> </ul>	<ul style="list-style-type: none"> <li>For use with USB Communication/Charging Cable Adapter (CBL-MC93-USBCHG-01);</li> <li>▶ For charging via AC Wall Outlet: USB Power Adapter (PWR-WUA5V12W0US - or country specific version)</li> <li>▶ For charging in-vehicle: USB Cigarette Lighter Adapter (CHG-AUTO-USB1-01)</li> </ul>

CBL-TC2X-USBC-01		USB-C cable for Charging/Communication	<ul style="list-style-type: none"> <li>▶ USB-A to USB-C cable</li> <li>▶ Attaches to Single Slot Charge/Communication Cradle (CRD-MC93-2SUCHG-01) OR to USB-C port on the USB Communication-Charging Cable Adapter (CBL-MC93-USBCHG-01).</li> <li>▶ Cable length is 1.5M (~5 ft.)</li> </ul>	<p>For use with USB Communication/Charging Cable Adapter (CBL-MC93-USBCHG-01):</p> <ul style="list-style-type: none"> <li>▶ For charging via AC Wall Outlet: USB Power Adapter (PWR-WUA5V12W0US - or country specific version)</li> <li>▶ For charging in-vehicle: USB Cigarette Lighter Adapter (CHG-AUTO-USB1-01)</li> </ul>
3rd party *		USB-C cable for Charging/Communication	<ul style="list-style-type: none"> <li>▶ Attaches to Single Slot Charge/Communication Cradle (CRD-MC93-2SUCHG-01) OR to USB-C port on the USB Communication-Charging Cable Adapter (CBL-MC93-USBCHG-01).</li> </ul>	<p>For use with USB Communication/Charging Cable Adapter (CBL-MC93-USBCHG-01):</p> <ul style="list-style-type: none"> <li>▶ For charging via AC Wall Outlet: USB Power Adapter (PWR-WUA5V12W0US - or country specific version)</li> <li>▶ For charging in-vehicle: USB Cigarette Lighter Adapter (CHG-AUTO-USB1-01)</li> </ul>
PSAK-UCE-C (3rd party) *		Portsmith USB Ethernet Adapter Kit	<ul style="list-style-type: none"> <li>▶ Connects to device via Single Slot USB cradle or Snap-On USB Cable.</li> <li>▶ Requires no separate power supply, has grounded wiring from both the USB and Ethernet ports, and operates on very low power draw directly from the USB connection.</li> <li>▶ Molded end caps enable the adapters to be aligned side by side or top to bottom, for efficient use of desktop space and organization of cables.</li> <li>▶ Kit includes: PSA1U1E adapter and USB-C cable for connecting to the device.</li> <li>▶ Does not require any additional drivers on device.</li> </ul>	<p>Charge/Communication Cradle (CRD-MC93-2SUCHG-01)</p> <p>or</p> <p>Charge/Communication Cable Adapter (CBL-MC93-USBCHG-01)</p>

**Snap-On Accessories**

Part Number	Picture	Description	Notes	Required Items
CBL-MC93-USBCHG-01		USB Communication/Charging Cable Adapter	<ul style="list-style-type: none"> <li>▶ Attaches to charge/communication port on bottom of device.</li> <li>▶ Provides both USB communications and charging support via USB-C connector.</li> <li>▶ Will charge battery from 0-90% in as little as 3.5 hours when used with USB Power Supply (PWR-WUA5V12W0xx)</li> </ul>	<ul style="list-style-type: none"> <li>▶ USB-C cable (CBL-TC5X-USBC2A-01 or CBL-TC2X-USBC-01) or similar 3rd party USB-C standard cable</li> <li>▶ USB charger...</li> </ul> <p><b>Indoor use:</b> order Country Specific version of USB Power Supply (PWR-WUA5V12W0xx)</p> <p><b>In Vehicle use:</b> USB Cigarette Lighter Adapter (CHG-AUTO-USB1-01)</p>






**Soft Goods - Cases/Holsters**

Part Number	Picture	Description	Notes	Required Items
-------------	---------	-------------	-------	----------------

<p>SG-MC9X-SHLSTG-01</p>		<p>MC9x Gun Holster</p>	<ul style="list-style-type: none"> <li>▶ Holster secures the MC9x-G on the user's waist and has the ability to also be used with a durable nylon adjustable belt or an adjustable nylon shoulder strap. (Belt and shoulder strap purchased separately).</li> <li>▶ Ballistic nylon case</li> <li>▶ Weep hole at bottom of case</li> <li>▶ Compatible with all MC9x-Gun configurations, including MC9300/MC9400.</li> <li>▶ Padding on side of Holster is slightly thicker than SG-MC9121112-01R.</li> <li>▶ Compatible with devices using Rubber Boot (SG-MC93-RBTG-01), although the fit will be tight.</li> </ul>	
<p>AI3844DW (3rd party) *</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>		<p>Ultima Case Holster with Belt Loop</p>	<ul style="list-style-type: none"> <li>▶ Durable, easy-care Ballistic Nylon exterior.</li> <li>▶ Hard-sided holster allows easy-in, easy-out access to device for fast-paced scanning.</li> <li>▶ Fixed belt loop with snaps for secure attachment to belt.</li> <li>▶ Retainer straps keep device in place and prevent accidental drops.</li> <li>▶ Elastic mesh pocket on front for a spare battery.</li> </ul>	
<p>S5716DWSP (3rd party) *</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>		<p>Fabric Holster Assy with Waist Pad for MC9x-G</p> 	<ul style="list-style-type: none"> <li>▶ Ergonomically designed waist pad keeps the holster snug to body and prevents it from flopping while walking</li> <li>▶ Holster is attached to the waist pad with a low profile D-swivel at top and hook &amp; loop at bottom</li> <li>▶ Sleek vinyl lining inside the holster facilitates easy insertion and removal of the unit</li> <li>▶ Retainer strap over handle prevents accidental drop of the unit</li> <li>▶ A safety strap secures the unit to waist pad</li> <li>▶ Exterior pocket is used for storing spare battery</li> <li>▶ Designed for left or right handed users</li> <li>▶ Not compatible with DPM (Direct Part Mark) scan engine configs.</li> </ul>	
<p>AI3881DW (3rd party) *</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>		<p>Ultima Case Magnetic Mountable Holster</p>	<ul style="list-style-type: none"> <li>▶ Perfect solution for leased forklift trucks.</li> <li>▶ No need to drill holes for installation.</li> <li>▶ 4 strategically located magnets allow the holster to be mounted on any flat, metal surface.</li> <li>▶ Hard-sided holster allows easy-in, easy-out access to device for fast-paced scanning.</li> <li>▶ Durable, easy-care Ballistic Nylon exterior.</li> <li>▶ Retaining strap secures device in place when not in use.</li> <li>▶ Pockets on sides for markers, pens, etc.</li> </ul>	
<p>U6003DWSPROS2 (3rd party) *</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>		<p>Large Replacement Swivel Belt Clips for holsters</p> 		

(3rd party) * <a href="http://www.ultimacase.com">http://www.ultimacase.com</a>	Agora Edge website	Additional Holsters for MC9x series		
(3rd party) * <a href="http://www.logisterra.com">http://www.logisterra.com</a>	Logisterra website	Additional Holsters for MC9x series		
11-08062-02R		Belt for holster	<ul style="list-style-type: none"> <li>▶ Belt is 2 inches wide</li> <li>▶ Extends to 48 inches</li> <li>▶ Has improved buckle and softer belt material</li> </ul>	
V6198DW (3rd party) * <a href="http://www.ultimacase.com">http://www.ultimacase.com</a>		Belt Extender	<ul style="list-style-type: none"> <li>▶ Used to extend the holster belt (11-08062-02R) an additional 10 inches</li> </ul>	
58-40000-007R		Shoulder Strap for MC9x Gun Holster	<ul style="list-style-type: none"> <li>▶ 1.5" wide, 22 to 50" max. length</li> </ul>	
SG-MC93-RBTG-01		Rubber Boot	<ul style="list-style-type: none"> <li>▶ Works with both Laser and Imager gun units</li> <li>▶ Devices with Boot will also fit into Gun Holster (SG-MC9X-SHLSTG-01). The fit will be tight though.</li> <li>▶ Does not increase drop spec of device. Designed to protect the device from the everyday nicks and dings.</li> <li>▶ Not compatible with Forklift Holder (MNT-MC93-FLCH-01).</li> <li>▶ Bottom portion of boot must be removed before inserting into Single Slot and Multi-Slot cradles.</li> <li>▶ Not compatible with DPM (Direct Part Mark) scan engine configs.</li> </ul>	
AH3488DW (3rd party) * <a href="http://www.ultimacase.com">http://www.ultimacase.com</a>		Ultima Case DirectTouch Case 	<ul style="list-style-type: none"> <li>▶ Durable, easy-care Ballistic Nylon exterior.</li> <li>▶ DirectTouch OP Case allows access to both screen &amp; keypad.</li> <li>▶ Web loop on each side of case allows attaching of stylus tether to the case.</li> <li>▶ Elastic loop on each side for left and right handed users of stylus.</li> <li>▶ 2 D-rings allow for optional shoulder strap.</li> </ul>	

KT-70147-01R		Belt Clip	Allows MC9x-G units to be hooked onto the Belt Clip using the unit's handstrap	▶ Handstrap (SG-MC93-HDSTPG-0)1
<b>Misc</b>				
Part Number	Picture	Description	Notes	Required Items
SG-MC93-HDSTPG-01		Handstrap (single strap)	<ul style="list-style-type: none"> <li>▶ This is an optional handstrap, not included on MC9300/MC9400 units.</li> <li>▶ Loop in handstrap provides storage for optional Stylus (SG-TC7X-STYLUS-03)</li> </ul>	
SG-TC7X-STYLUS1-03 (pack of 3)  SG-TC5X-STYLUS-50 (pack of 50) <small>NOTE: 50-pack is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</small>		Stylus	<ul style="list-style-type: none"> <li>▶ Conductive Carbon-filled plastic material w/ 5mm tip.</li> <li>▶ Length of stylus is 3.5".</li> <li>▶ Rigid plastic stylus is optimized for enterprise durability.</li> <li>▶ Clip &amp; tether point to reduce loss.</li> <li>▶ When not being used stylus can be stored in loop on Handstrap or in the optional Holster</li> </ul>	
SG-TC7X-STYLUS-03 (pack of 3)  SG-TC7X-STYLUS-06 (pack of 6) <small>NOTE: 6-pack is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</small>		Stylus Kit with Tether	<ul style="list-style-type: none"> <li>▶ Includes fine-pitch, capacitive Stylus (SG-TC7X-STYLUS1-03) and coiled tether (KT-TC7X-TETHR1-03)</li> <li>▶ Conductive Carbon-filled plastic material w/ 5mm tip.</li> <li>▶ Length of stylus is 3.5".</li> <li>▶ Rigid plastic stylus is optimized for enterprise durability.</li> <li>▶ Clip &amp; tether point to reduce loss. Tether to Handstrap</li> <li>▶ When not being used stylus can be stored in loop on Handstrap or in the optional Holster</li> </ul>	



<p>SG-STYLUS-TCX-MTL-03 (pack of 3)</p>		<p>Fiber Tipped Stylus</p>	<ul style="list-style-type: none"> <li>▶ Black Passive Stylus with Zebra logo</li> <li>▶ 5" length</li> <li>▶ Heavy duty - made from stainless steel and brass. No plastic parts - real pen feel.</li> <li>▶ Can be used in rain.</li> <li>▶ Micro-Knit Hybrid Mesh Fiber Tip provides silent, smooth gliding use.</li> <li>▶ Big improvement over rubber tipped or plastic tipped stylus.</li> <li>▶ Compatible with all capacitive touch screen devices.</li> <li>▶ Can be tethered to device using SG-TC5NGTC7NG-TETHR-03.</li> </ul>	
<p>SG-TC5NGTC7NG-TETHR-03 (pack of 3)</p>		<p>Tether for Stylus</p>	<ul style="list-style-type: none"> <li>▶ String type tether prevents loss of stylus</li> <li>▶ NOTE: This tether is recommended when using Fiber Tipped Stylus (SG-STYLUS-TCX-MTL-03). Other tethers may not fit easily through the tether loop hole on the stylus.</li> </ul>	
<p>KT-TC7X-TETHR1-03 (pack of 3)</p>		<p>Replacement Coiled Tether for Stylus</p>	<ul style="list-style-type: none"> <li>▶ This tether is included with Stylus Kit with Tether (SG-TC7X-STYLUS-03)</li> <li>▶ Not recommended when using Fiber Tipped Stylus (SG-STYLUS-TCX-MTL-03).</li> </ul>	
<p>SG-ET5X-SLTETR-01 (single)</p>		<p>Replacement Coiled Tether for Stylus</p>	<ul style="list-style-type: none"> <li>▶ This tether is typically used with the ET5X series' stylus but can be used with MC9300/MC9400 Stylus.</li> <li>▶ Not recommended when using Fiber Tipped Stylus (SG-STYLUS-TCX-MTL-03).</li> </ul>	
<p>MISC-MC93-SCRN-01 (pack of 5)</p>		<p>Tempered Glass Screen Protector (pack of 5)</p>	<ul style="list-style-type: none"> <li>▶ Tempered glass</li> <li>▶ Includes alcohol wipes, cleaning cloth and tools needed for screen protector installation.</li> </ul>	

Vehicle/Forklift Cradles and Holders

Powered Cradles and Holders (provides device charging)

Part Number	Picture	Description	Notes	Required Items
712134 (Standard cradle)  712135 (Cradle with Swiveling Top Support)  (3rd party) *  <a href="http://www.proclipusa.com/category/zebra">http://www.proclipusa.com/category/zebra</a>		ProClip Charge-Only Vehicle Mount Cradle with Cigarette Lighter Adapter	<ul style="list-style-type: none"> <li>▶ Front Facing - allows user to access screen and keyboard while cradled.</li> <li>▶ Compatible with 12-24V vehicle systems and provides 3A current for fast device charging.</li> <li>▶ Mount ready via AMPS hole pattern to ProClip pedestal or forklift mounts.</li> <li>▶ Fits devices with or without hand strap attached.</li> </ul>	Mount on vehicle using ProClip Pedestal or Forklift Mount - see ProClip website
713134 (Standard cradle)  713135 (Cradle with Swiveling Top Support)  216096 (High Vibration Cradle with Swiveling Top Support)  (3rd party) *  <a href="http://www.proclipusa.com/category/zebra">http://www.proclipusa.com/category/zebra</a>		ProClip Charge-Only Vehicle Mount Cradle with Hard Wired Adapter	<ul style="list-style-type: none"> <li>▶ Front Facing - allows user to access screen and keyboard while cradled.</li> <li>▶ Compatible with 12-24V vehicle systems and provides 3A current for fast device charging.</li> <li>▶ Mount ready via AMPS hole pattern to ProClip pedestal or forklift mounts.</li> <li>▶ Fits devices with or without hand strap attached.</li> <li>▶ High Vibration cradle includes additional dampener to protect device when mounting on higher vibration vehicles (i.e. fork lifts).</li> <li>▶ Cradles with Top Support not compatible with DPM (Direct Part Mark) scan engine configs.</li> </ul>	Mount on vehicle using ProClip Pedestal or Forklift Mount - see ProClip website
various SKUs  (3rd party) *  <a href="https://www.rammount.com">https://www.rammount.com</a>		RAM Vehicle Cradles	<ul style="list-style-type: none"> <li>▶ Spring-loaded cradle allows easy one handed insertion and removal.</li> <li>▶ Compatible with RAM two-hole AMPS pattern diamond bases that will connect to C size ball mounts, allowing for a wide variety of mounting options.</li> <li>▶ Various Cradle options:                             <ul style="list-style-type: none"> <li>- Charge-Only</li> <li>- Charge and single USB option - single port (for Printer, Keyboards, mouse, scanners)</li> <li>- Key Locking</li> <li>- Heated POGO pins for operations in wet and freezing environments.</li> </ul> </li> <li>▶ The USB port will not support DS3608-ER scanner in full power mode.</li> <li>▶ Open cup design allows scanner to be used while docked.</li> </ul>	<p><b>For Charging</b>                      RAM GDS Modular Charger, see below</p> <p><b>For Mounting</b>                      ▶ see RAM website for options</p>



<p>3PTY-RAM-GDSCABUSBADC901U (USB-A to 5.5mm DC cable only)</p> <p>3PTY-RAMGDSCHARGEM55V7B1U (10-30V input range)</p> <p>3PTY-RAM-GDSCCHARGEM55V8BU (30-64V input range)</p> <p>NOTE: Products sold that do not bear the Zebra brand name are serviced and supported exclusively by their manufacturers in accordance with terms and conditions packaged with the products. Zebra's Limited Warranty does not apply to products that are not Zebra branded, even if packaged or sold with Zebra products. Please contact the manufacturer directly for technical support and customer service. See PMB 11136 for more info.</p>		<p>RAM GDS Modular Charger</p>	<ul style="list-style-type: none"> <li>▶Used to power RAM Vehicle Cradles</li> <li>▶Charger includes: <ul style="list-style-type: none"> <li>- USB Type-A male connection to 5.5mm DC connector adapter cable</li> <li>- Hard wired power adapter, USB Type-A female connector; 10-30V or 30-64V input range, 5V output</li> </ul> </li> <li>▶Eases device upgrades by avoiding rewiring, just unplug power connector and attach new charger components</li> </ul>	
<p>various SKUs</p> <p>(3rd party) *</p> <p><a href="https://www.rammount.com">https://www.rammount.com</a></p>		<p>RAM GDS Modular Chargers</p>	<ul style="list-style-type: none"> <li>▶Used to power RAM Vehicle Cradles</li> <li>▶Chargers includes: <ul style="list-style-type: none"> <li>- USB Type-A male connection to 5.5mm DC connector adapter cable</li> <li>- Hard wired power adapter, USB Type-A female connector; 10-30V or 30V-64V input range, 5V output</li> </ul> </li> <li>▶When upgrading devices, avoid rewiring by unplugging power connector and attaching new charger components</li> </ul>	


**Un-Powered Cradles and Holders (passive holders, no charging support)**

Part Number	Picture	Description	Notes	Required Items
<p>MNT-MC93-FLCH-01</p>		<p>MC9X Forklift Holder (passive - unpowered)</p>	<ul style="list-style-type: none"> <li>▶Bracket holds MC9X for convenient mounting on fork lift.</li> <li>▶Installs on a roll bar or square surface of the forklift and allows the device to be used in landscape or portrait mode.</li> <li>▶Includes RAM B size ball (1" diameter) on back of holder.</li> <li>▶Does NOT provide device charging.</li> <li>▶Not compatible with devices with rubber boot attached.</li> <li>▶Not compatible with DPM (Direct Part Mark) scan engine configs.</li> </ul>	
<p>MNT-RAM-B201U</p>		<p>RAM Mount Arm for MC9X00 Fork Lift Cradle</p>	<ul style="list-style-type: none"> <li>▶Used with Fork Lift Holder (MNT-MC93-FLCH-01)</li> <li>▶RAM Double Sock Arm for 1" ball (B size)</li> <li>▶Uses RAM Mount P/N RAM-B-201U</li> </ul>	
<p>MNT-RAM-B247U25</p>		<p>RAM Mount Base for MC9X00 Fork Lift Cradle</p>	<ul style="list-style-type: none"> <li>▶Used with Fork Lift Holder (MNT-MC93-FLCH-01)</li> <li>▶Attaches to square shaped rail/post of forklift.</li> <li>▶2.5" Max Width Square Rail Base with 1" diameter ball (B size)</li> <li>▶Uses RAM Mount P/N RAM-B-247U-25</li> </ul>	








<p>710134 (Standard holder)</p> <p>710135 (Holder with Swiveling Top Support)</p> <p>(3rd party) *</p> <p><a href="http://www.proclipusa.com/category/zebra">http://www.proclipusa.com/category/zebra</a></p>		<p>ProClip MC9300 Vehicle Mount Holder (unpowered)</p>	<ul style="list-style-type: none"> <li>▶ Front Facing - allows user to access screen and keyboard while cradled.</li> <li>▶ Mount ready via AMPPS hole pattern to ProClip pedestal or forklift mounts.</li> <li>▶ Fits devices with or without hand strap attached.</li> <li>▶ Holder with Top Support not compatible with DPM (Direct Part Mark) scan engine configs.</li> </ul>	<p>Mount on vehicle using ProClip Pedestal or Forklift Mount - see ProClip website</p>
<p>RAP-450U</p> <p>(3rd party) *</p> <p><a href="https://www.rammount.com">https://www.rammount.com</a></p>		<p>RAM Power-Grip™ XL Universal Scanner Gun Holder</p>	<ul style="list-style-type: none"> <li>▶ Universal scanner gun holder is designed for use with several large form factor scanner guns.</li> <li>▶ Compatible with a full range of ball and socket forklift mounting systems.</li> <li>▶ Uses high-strength composite materials.</li> <li>▶ Holder features two attachment points: (1) the hole pattern on the back of the holder allows for the connection of the RAM-202U or the RAM-D-254U (hardware is included for these attachments) or (2) the hole pattern on the bottom of the holder allows for the connection of a 2" x 3" plate – RAM-202U-23 or RAM-D-202U-23 – or a drill-down mount (hardware is not included for these attachments).</li> </ul>	
<p>Y6911DWSP (formerly S5691DWSP)</p> <p>(3rd party) *</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>		<p>Wall Mountable/Fork lift Mountable Holster for MC9xxx-G</p>	<ul style="list-style-type: none"> <li>▶ Mounting holes reinforced with grommets for 3 mounting options: back, left side, or right side.</li> <li>▶ Stiffeners in all walls provide structure and rigidity for forklift or wall mount.</li> <li>▶ Sleek vinyl lining inside for easy insertion and removal of the unit.</li> <li>▶ Retainer strap over handle to prevent accidental drops.</li> <li>▶ Pocket on each side for marker/pen</li> <li>▶ Not compatible with DPM (Direct Part Mark) scan engine configs.</li> </ul>	
<p>Y6911DW</p> <p>(3rd party) *</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>		<p>Holster Forklift/Wallmount</p>	<ul style="list-style-type: none"> <li>▶ Durable, easy-care Ballistic Nylon exterior.</li> <li>▶ Mounting holes allow holster to mount on wall. (Cable ties allows holster to mount on forklift.)</li> <li>▶ Easy-in, easy-out access to device for fast-paced scanning.</li> <li>▶ Retainer strap secures device during forklift travel.</li> <li>▶ Pockets on sides for markers, pens, etc.</li> </ul>	
<p>SY-VM90G-TOP</p> <p>(3rd party) *</p> <p><a href="http://www.logisterra.com">http://www.logisterra.com</a></p>		<p>MC9x Gun Vehicle Mount Cradle</p>	<ul style="list-style-type: none"> <li>▶ Not compatible with DPM (Direct Part Mark) scan engine configs.</li> </ul>	

<p>00-8053SP (3rd party) *</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>		<p>Kydex Holster w/Metal Bracket for MC90xx Gun, Brick, or Short</p>	<p>AG3204DW (3rd party) *</p>	
<p>AC1748DW (3rd party) *</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>		<p>Fabric Forklift Mount Holster</p>	<ul style="list-style-type: none"> <li>▶ Durable, easy-care Ballistic Nylon exterior.</li> <li>▶ Easy-in, easy-out access to device for fast-paced scanning.</li> <li>▶ Custom metal bracket for mounting the holster to a forklift or other flat surfaces.</li> <li>▶ Reinforced design for added protection.</li> <li>▶ Not compatible with DPM (Direct Part Mark) scan engine configs.</li> </ul>	
<p>7160-1306 (3rd party) *</p> <p><a href="https://www.gamberjohnson.com">https://www.gamberjohnson.com</a></p>		<p>Gamber-Johnson Scanner Pocket Mount with Small Back Plate</p>	<ul style="list-style-type: none"> <li>▶ Scanner mount is designed to support scanner or handheld computer in a rugged environment by holding it securely to the overhead guard leg of fork lift vehicle.</li> <li>▶ Adjustable in width, and offers 3 mounting orientations from the overhead guard leg or one of Gamber-Johnson's extension bars.</li> <li>▶ Designed to hold most handheld computers and scanners.</li> <li>▶ Adjustable to fit 3.5" to 4.5" width and set at 2.5" tall</li> <li>▶ Designed to be orientated inside, outside, or inline with the overhead guard leg.</li> <li>▶ Attaches to rectangular overhead guard legs that are 1.5 in to 2.5 in (3.81 cm to 6.35 cm) wide.</li> <li>▶ Not compatible with DPM (Direct Part Mark) scan engine configs.</li> </ul>	
<p>AJ4040DW (3rd party) *</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>		<p>Ultima Case Kydex Workstation with RAM Mount</p>	<ul style="list-style-type: none"> <li>▶ Allows data input while in the holster.</li> <li>▶ Easy-in, easy-out access to device for fast-paced scanning.</li> <li>▶ RAM Mount allows holster to be adjusted to comfortable user experience for data input.</li> </ul>	
<p>SG-MOT-90-BT or SG-MOT-90-BT (for Gun units with attached rubber boot - 11-67218-04R) (3rd party) *</p> <p><a href="http://www.smart-grip.com">http://www.smart-grip.com</a></p>		<p>MC9x Gun or Brick Vehicle Mount Cradle</p>	<ul style="list-style-type: none"> <li>▶ Can be used on forklifts, carts, work benches, etc.</li> <li>▶ Readable screen while in holder</li> <li>▶ Useable Keyboard while in Holder</li> <li>▶ Fully Adjustable Mounting</li> <li>▶ Open End Supports Adapter and Cables</li> <li>▶ Angled Fingers Support Terminal</li> <li>▶ Angle and Tapered Sides for Secure Support</li> <li>▶ All Steel Construction</li> <li>▶ Supports RFID configurations also.</li> </ul>	


<p>127 -12 12 Volt Heated holder 127 -24 24 Volt Heated holder 127 -3648 36 - 48 Volt Heated holder</p> <p>(3rd party) *</p> <p><a href="http://www.jlcsolutions.biz">http://www.jlcsolutions.biz</a></p>		<p>MC9x Gun Heated Vehicle Mount holster/holder</p>	<ul style="list-style-type: none"> <li>▶Eliminates the “Fogging” and “Freezing” on the laser scanner lens and on the terminal’s display screen caused by temperature and humidity changes.</li> <li>▶This is accomplished by placing two thermostatically controlled heating pads designed to put the right amount of heat at both key points.</li> <li>▶Can be used on forklifts, carts, work benches, etc.</li> <li>▶Not compatible with DPM (Direct Part Mark) scan engine configs.</li> </ul>	
<p>(3rd party) *</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>	<p>Agora Edge website</p>	<p>Additional Vehicle Holders/Cradles for MC90xx series</p>		










**Headset/Audio Accessories**  
**NOTE: Wired headsets not supported. Use Bluetooth headset instead.**  
 Bluetooth headsets with PTT function not supported by Zebra PTT Express application. Check Zebra WFC Central Client app Release Notes to verify compatibility.

Part Number	Picture	Description	Notes	Required Items
<p>See HS2100-HS3100 Accessories Document</p>		<p>HS3100 Rugged Bluetooth Headset for VDP applications</p>	<ul style="list-style-type: none"> <li>▶HD Voice, also known as Wide Band Audio, brings incredible audio clarity</li> <li>▶Built to handle the everyday inevitable drops</li> <li>▶Dustproof, sprayproof and waterproof</li> <li>▶Ready for the freezer and outdoor subzero temperatures</li> <li>▶Feather-light for extraordinary comfort</li> <li>▶Noise cancellation tuned for VDP (voice directed picking) applications.</li> <li>▶Not designed for the aggressive noise cancellation required for VoIP or voice calls. Headset’s send level is not tuned to satisfy VoIP or voice standards and will result with audio being quieter at the far end and delivering more noise.</li> <li>▶Swap batteries on the fly — without losing the Bluetooth connection</li> <li>▶Split-second tap-to-pair simplicity using NFC.</li> <li>▶Detachable swivel boom minimizes costs.</li> <li>▶Swivelling boom mutes microphone allowing uses to prevent voice pick applications from recognizing non-voice pick conversations.</li> <li>▶User-replaceable pads and windscreens maximize comfort and hygiene</li> <li>▶15 hours of battery power</li> </ul>	<p>▶ See HS2100/HS3100 Accessories Document for headset accessories</p>
<p>various Bluetooth models B550-XT B350-XT C400-XT C300-XT</p> <p>(3rd party) *</p> <p><a href="http://www.blueparrott.com">http://www.blueparrott.com</a></p>		<p>BlueParrott Bluetooth Headsets</p>	<ul style="list-style-type: none"> <li>▶Various Bluetooth models available with options that include:             <ul style="list-style-type: none"> <li>- Blocking out 96% of background noise</li> <li>- Over 24 hours of talk time</li> <li>- NFC Tap to Pair capable</li> <li>- Bluetooth wireless range capable up to 300 ft.</li> <li>- Convertible wearing options: over the head, behind the neck.</li> </ul> </li> </ul> <p>See BlueParrot site for model specific options.</p>	

<p>APTT1 or APTT2 (3rd party) *</p> <p><a href="https://www.aina-wireless.com/">https://www.aina-wireless.com/</a></p>		<p>Aina Push-To-Talk (PTT) Bluetooth Voice Responder Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> <li>▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support).</li> <li>▶ Includes clip for attaching device to clothing for lapel speaker/mic usage.</li> <li>▶ Features several buttons which the application developers can assign to different functions.</li> <li>▶ Users can remotely control functions such as push-to-talk, phone calls, channel switching and emergency alerts.</li> <li>▶ Device is ruggedized, MIL-STD 810G and IP67.</li> <li>▶ Long lasting battery designed for 24 hour approx battery life. Can be recharged via micro-USB port.</li> <li>▶ Includes 3.5mm headset jack allowing headphones to be connected for keeping conversations more private.</li> <li>▶ Can be easily paired to mobile computer using NFC tap-to-pair.</li> </ul>	
<p>BTR-155 (3rd party) *</p> <p><a href="https://www.savoxaccessories.com">https://www.savoxaccessories.com</a></p>		<p>Savox BTR-155 Bluetooth Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> <li>▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support).</li> <li>▶ Includes clip for attaching device to clothing for lapel speaker/mic usage.</li> <li>▶ Rugged wireless speaker microphone IP55.</li> <li>▶ Allows cable-free movement</li> <li>▶ Familiar speaker microphone functions; PTT and volume buttons</li> <li>▶ Includes 2.5mm headset jack allowing headphones to be connected for keeping conversations more private.</li> <li>▶ LED status indication</li> <li>▶ High speaker volume</li> <li>▶ Includes: <ul style="list-style-type: none"> <li>- Savox RSM</li> <li>- Modular Wired earpiece</li> <li>- Wall Charger</li> <li>- USB Cable</li> <li>- Quick Start Guide</li> <li>- Carrying Strap</li> </ul> </li> </ul>	
<p>various (3rd party) *</p> <p><a href="http://stonemountainld.com">http://stonemountainld.com</a></p>		<p>Stone Mountain BluSkye Bluetooth Remote Speaker Mic (RSM)</p>	<ul style="list-style-type: none"> <li>▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support).</li> <li>▶ Device is ruggedized, MIL-STD 810G and IP68.</li> </ul>	



**Power Cords/Power Supplies**

Part Number	Picture	Description	Notes	Required Items
CBL-DC-388A1-01		DC Power Cord	<ul style="list-style-type: none"> <li>▶ Used along with Power Supply PWR-BGA12V50W0WW to power CRD9000-1001S, ADP9000, and MSR9000.</li> <li>▶ Cable length is 1.8 meters</li> </ul>	

CBL-DC-395A1-01		DC Power Cord	Used along with Power Supply PWR-BGA12V50W0WW to power SAC9000 4-Slot Battery Charger	
PWR-BGA12V50W0WW		Power Supply	<ul style="list-style-type: none"> <li>▶ Used to power CRD9000-1001S, ADP9000, and MSR9000.</li> <li>▶ 100-240 VAC, 12V, 4.16A, 50W</li> <li>▶ Provides US DOE Level VI compliance for power efficiency.</li> <li>▶ Replaces PWRS-14000-148R</li> </ul>	<ul style="list-style-type: none"> <li>▶ DC Line Cord (CBL-DC-388A1-01)</li> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>
KIT-PWR-12V50W		Power Supply Kit for Single Slot Cradle and Snap-Ons	<ul style="list-style-type: none"> <li>▶ Used to power CRD9000-1001S, ADP9000, and MSR9000</li> <li>▶ Includes Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-388A1-01)</li> </ul>	<ul style="list-style-type: none"> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>
KT-PWR-50W395A1-01		Power Supply Kit for 4-Slot Battery Charger	<ul style="list-style-type: none"> <li>▶ Used to power SAC9000 Battery Charger</li> <li>▶ Includes Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-395A1-01)</li> </ul>	<ul style="list-style-type: none"> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>
CBL-DC-381A1-01		DC Power Cord	<ul style="list-style-type: none"> <li>▶ Used to power 4-Slot Cradles when using Level VI Efficiency power supply (PWR-BGA12V108W0WW)</li> <li>▶ This cable does not include the black extension release latch which is not required when used on Multi-Slot ShareCradles.</li> </ul>	
CBL-DC-382A1-01		DC Power Cord	<ul style="list-style-type: none"> <li>▶ Used to power 4-Slot Cradles when using Level VI Efficiency power supply (PWR-BGA12V108W0WW)</li> <li>▶ Cable has black extension tab for releasing the cable from the back of the cradle. This isn't required when using Multi-Slot ShareCradles.</li> </ul>	
CBL-DC-523A1-01		2-Way DC Y Power Cord	<ul style="list-style-type: none"> <li>▶ Used to power two 4-Slot Battery Chargers with one Power Supply (PWR-BGA12V108W0WW)</li> </ul>	
PWR-BGA12V108W0WW		Power Supply	<ul style="list-style-type: none"> <li>▶ Used to power Four Slot Cradles and SAC9000 Battery Charger</li> <li>▶ 100-240 VAC, 12V, 9A, 108W</li> <li>▶ Provides US DOE Level VI compliance for power efficiency.</li> <li>▶ Replaces PWRS-14000-241R</li> </ul>	<ul style="list-style-type: none"> <li>▶ CBL-DC-382A1-01</li> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>
23844-00-00R		AC Cable	<ul style="list-style-type: none"> <li>▶ This AC Line Cord is for use in North America. See the <b>AC Line Cords by Country</b> TAG for comparable line cords to use in other countries.</li> </ul>	



<p>PWR-WUA5V12W0US (US plug style) PWR-WUA5V12W0GB (UK plug style) PWR-WUA5V12W0EU (EU plug style) PWR-WUA5V12W0AU (Australia plug style) PWR-WUA5V12W0CN (China plug style) PWR-WUA5V12W0IN (India plug style) PWR-WUA5V12W0KR (Korea plug style) PWR-WUA5V12W0BR (Brazil plug style) PWR-WUA5V12W0LA (Argentina/Chile/Mexico plug styles)</p>		<p>USB Power Supply</p>	<ul style="list-style-type: none"> <li>▶ Used with USB Communication/Charging Cable Adapter (CBL-MC93-USBCHG-01) to provide a lower cost charging solution than using a Cradle.</li> <li>▶ Provides higher current (2.5A) for faster charging</li> <li>▶ 100-240 VAC, 5 V, 2.5 A</li> </ul>	<ul style="list-style-type: none"> <li>▶ USB Communication/Charging Cable Adapter (CBL-MC93-USBCHG-01)</li> <li>▶ USB-C Cable (CBL-TC2X-USBC-01) or (CBL-TC5X-USBC2A-01)</li> </ul>
<p>CHG-AUTO-USB1-01  CHG-AUTO-USB1-BR (for Brazil)</p>		<p>USB Cigarette Lighter Adapter for MC93</p>	<ul style="list-style-type: none"> <li>▶ Used with USB Communication/Charging Cable Adapter (CBL-MC93-USBCHG-01) to provide in-vehicle charging.</li> <li>▶ Includes two USB A ports providing higher current (2.5A) for faster charging</li> </ul>	<ul style="list-style-type: none"> <li>▶ USB Communication/Charging Cable Adapter (CBL-MC93-USBCHG-01)</li> <li>▶ USB-C Cable (CBL-TC2X-USBC-01) or (CBL-TC5X-USBC2A-01)</li> </ul>

**Batteries**







Part Number	Picture	Description	Notes	Required Items
<p>BTRY-MC93-STN-01 (single)  BTRY-MC93-STN-10 (10 pack)  BTRY-MC93-STN-IN (for use in India)</p>		<p>Spare Standard Battery with PowerPrecision Plus (7000 mAh - 25Wh)</p> 	<ul style="list-style-type: none"> <li>▶ Designed, manufactured &amp; tested to meet rigorous controls &amp; standards</li> <li>▶ Premium-grade cells with higher capacity &amp; longer life cycle</li> <li>▶ Designed to help prevent overcharging &amp; electrical shock</li> <li>▶ Strong &amp; robust housing for optimal performance &amp; durability</li> <li>▶ Information available: <ul style="list-style-type: none"> <li>- Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device.</li> <li>- Advanced State of Health (highly accurate end-of-life prediction)</li> <li>- Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency).</li> </ul> </li> </ul>	










<p>BTRY-MC94-BLE-01 (single)</p> <p>BTRY-MC94-BLE-10 (10 pack)</p> <p>BTRY-MC94-BLE-IN (for use in India)</p>		<p>Spare Standard Battery with PowerPrecision Plus and BLE beacon (7000 mAh - 25Wh)</p> 	<ul style="list-style-type: none"> <li>▶ Designed, manufactured &amp; tested to meet rigorous controls &amp; standards</li> <li>▶ Premium-grade cells with higher capacity &amp; longer life cycle</li> <li>▶ Designed to help prevent overcharging &amp; electrical shock</li> <li>▶ Strong &amp; robust housing for optimal performance &amp; durability</li> <li>▶ Information available: <ul style="list-style-type: none"> <li>- Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device.</li> <li>- Advanced State of Health (highly accurate end-of-life prediction)</li> <li>- Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency).</li> </ul> </li> <li>▶ Includes Bluetooth beacon allowing device to be located while powered off using solutions like Zebra Device Tracker. Once the battery can no longer power the device the BLE beacon in the battery will continue to beacon for about 14-21 days.</li> <li>▶ NOTE: MC9300 may require OS/LifeGuard update to support Bluetooth beacon feature.</li> <li>▶ Battery purchase is eligible for discounted Device Tracker 1-year or 3-year subscription. See PMB 10836 for details.</li> </ul>	 <p>▶ Typically purchased along with a Device Tracker 1-year or 3-year subscription. Battery is eligible for a discounted Device Tracker subscription:</p> <p>SW-BLE-DT-SP-1YR (1 year) or SW-BLE-DT-SP-3YR (3 year)</p> <p>See PMB 10836 for details.</p>
<p>BTRY-MC93-FRZ-01 (single)</p> <p>BTRY-MC93-FRZ-10 (10 pack)</p>		<p>Spare Freezer Battery with PowerPrecision Plus (5000 mAh - 18Wh)</p> 	<ul style="list-style-type: none"> <li>▶ Designed, manufactured &amp; tested to meet rigorous controls &amp; standards</li> <li>▶ Premium-grade cells with higher capacity &amp; longer life cycle</li> <li>▶ Designed to help prevent overcharging &amp; electrical shock</li> <li>▶ Strong &amp; robust housing for optimal performance &amp; durability</li> <li>▶ Information available: <ul style="list-style-type: none"> <li>- Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device.</li> <li>- Advanced State of Health (highly accurate end-of-life prediction)</li> <li>- Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency).</li> </ul> </li> <li>▶ Lower battery capacity (5000 mAh) compared to standard battery (7000 mAh) is capable of providing more power at typical freezer temperature than the standard battery.</li> </ul>	

<p>BTRY-MC93-NI-01 (single)</p> <p>BTRY-MC93-NI-10 (10 pack)</p>		<p>Spare Non-Incendive Battery with PowerPrecision Plus (7000 mAh - 25Wh)</p> 	<ul style="list-style-type: none"> <li>▶ Battery is designed to be used with MC9300MC9400 NI (Non-Incendive) devices.</li> <li>▶ Designed, manufactured &amp; tested to meet rigorous controls &amp; standards</li> <li>▶ Premium-grade cells with higher capacity &amp; longer life cycle</li> <li>▶ Designed to help prevent overcharging &amp; electrical shock</li> <li>▶ Strong &amp; robust housing for optimal performance &amp; durability</li> <li>▶ Information available: <ul style="list-style-type: none"> <li>- Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device.</li> <li>- Advanced State of Health (highly accurate end-of-life prediction)</li> <li>- Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency).</li> </ul> </li> </ul>	
--	---	---	---	--

**Replacement Keypads**

Part Number	Picture	Description	Notes	
<p>KYPD-MC9329NMR-01 (single)</p> <p>KYPD-MC9329NMR-10 (pack of 10) ▶ Discontinued 8/2021 - see PMB 10694</p>		<p>29-Key Numeric Primary keyboard</p>	<ul style="list-style-type: none"> <li>▶ Freezer compatible</li> <li>▶ Backlight compatible</li> <li>▶ Indoor / Outdoor use</li> <li>▶ NOTE: Will be updated to use green scanner trigger button (from MC94) vs. yellow as stock runs out (see photo at right).</li> </ul>	
<p>KYPD-MC9334FNR-01 (single)</p> <p>KYPD-MC9334FNR-10 (pack of 10) ▶ Discontinued 8/2021 - see PMB 10694</p>		<p>34-Key keyboard</p>	<ul style="list-style-type: none"> <li>▶ Freezer compatible</li> <li>▶ Backlight compatible</li> <li>▶ Indoor / Outdoor use</li> <li>▶ NOTE: Will be updated to use green scanner trigger button (from MC94) vs. yellow as stock runs out (see photo at right).</li> </ul>	
<p>KYPD-MC9343FN-01 (single)</p> <p>KYPD-MC9343FN-10 (pack of 10) ▶ Discontinued 8/2021 - see PMB 10694</p>		<p>43-Key keyboard</p>	<ul style="list-style-type: none"> <li>▶ Freezer compatible</li> <li>▶ Backlight compatible</li> <li>▶ Indoor / Outdoor use</li> <li>▶ NOTE: Will be updated to use green scanner trigger button (from MC94) vs. yellow as stock runs out (see photo at right).</li> </ul>	



<p>KYPD-MC9353ANR-01 (single)</p> <p>KYPD-MC9353ANR-10 (pack of 10)</p>		<p>53-Key Standard keyboard</p>	<ul style="list-style-type: none"> <li>▶ Freezer compatible</li> <li>▶ Backlight compatible</li> <li>▶ Indoor / Outdoor use</li> <li>▶ NOTE: Will be updated to use green scanner trigger button (from MC94) vs. yellow as stock runs out (see photo at right).</li> </ul>	
<p>KYPD-MC9353VT-01 (single)</p> <p>KYPD-MC9353VT-10 (pack of 10)</p>		<p>53-Key VT keyboard</p>	<ul style="list-style-type: none"> <li>▶ Freezer compatible</li> <li>▶ Backlight compatible</li> <li>▶ Indoor / Outdoor use</li> <li>▶ NOTE: Will be updated to use green scanner trigger button (from MC94) vs. yellow as stock runs out (see photo at right).</li> </ul>	
<p>KYPD-MC93535250-01 (single)</p> <p>KYPD-MC93535250-10 (pack of 10)</p>		<p>53-Key 5250 keyboard</p>	<ul style="list-style-type: none"> <li>▶ Freezer compatible</li> <li>▶ Backlight compatible</li> <li>▶ Indoor / Outdoor use</li> <li>▶ NOTE: Will be updated to use green scanner trigger button (from MC94) vs. yellow as stock runs out (see photo at right).</li> </ul>	
<p>KYPD-MC9358ANR-01 (single)</p> <p>KYPD-MC9358ANR-10 (pack of 10)</p>		<p>58-Key Alpha-Numeric keyboard</p>	<ul style="list-style-type: none"> <li>▶ Freezer compatible</li> <li>▶ Backlight compatible</li> <li>▶ Indoor / Outdoor use</li> <li>▶ NOTE: Will be updated to use green scanner trigger button (from MC94) vs. yellow as stock runs out (see photo at right).</li> </ul>	